

High Bandwidth Voltage Sensor

OVERVIEW

The Entube-Z is a high bandwidth voltage transducer designed for single ended measurements in a very compact form factor, and without need for power supplies. This series covers the ranges of $\pm 100V$, $\pm 200V$, $\pm 300V$, $\pm 400V$, $\pm 500V$, $\pm 750V$, $\pm 1kV$, $\pm 2kV$, $\pm 3kV$, $\pm 4kV$ and $\pm 5kV$ with up to 50MHz bandwidth and 0.5% of signal accuracy.

The Entube-Z generates a $\pm 2V$ or $\pm 1V$ scaled down version of its input signal, which can then be processed by most computer based measurement platforms.

SPECIFICATION

Accuracy	$\pm 0.5\%$
Bandwidth [-3dB point]	50MHz
Input-Output non-linearity	< 250 ppm
Output voltage	$\pm 1V$ and $\pm 2V$
Gain temperature drift	± 100 ppm/ $^{\circ}C$
Max total phase shift at 50Hz	< 0.05°
Output type	Single-ended signal
Output Offset Voltage [Referenced to output]	< $\pm 10\mu V$
Output connector	BNC (Plug)

ENVIRONMENTAL

Operating temperature	- 35 to 70 $^{\circ}C$
Storage temperature	- 40 to 80 $^{\circ}C$

ELECTRONICAL

Electronical	100z	200z	300z	400z	500z	750z	1000z	2000z	3000z	4000z	5000z
Scaling Factor (2V output voltage)	50 : 1	100 : 1	150 : 1	200 : 1	250 : 1	375 : 1	500 : 1	1000 : 1	1500 : 1	2000 : 1	2500 : 1
Input dynamic range (Working Voltage)	100V	200V	300V	400V	500V	750V	1000V	2000V	3000V	4000V	5000V
Max Peak Surge Voltage (50Hz sinewave for 100ms)	2kV		5kV			10kV		15kV	15kV	20kV	> 50 M
Input impedance at 50Hz	> 5 M Ω		> 10 M Ω			> 10 M Ω		> 20 M Ω	> 30 M Ω	> 40 M Ω	> 50 M Ω


MECHANICAL

Mechanical	100z	200z	300z	400z	500z	750z	1000z	2000z	3000z	4000z	5000z
Input connector (1-Pin Coaxial)	BNC					SHV			SHV		
Outer Dimensions (Cylindrical shape)	0.68"Ø x 3.0"					0.68"Ø x 3.29"			0.68"Ø x 3.29"		
Weight	34 g (1.2 oz)					180g (6.3 oz)			180g (6.3 oz)		

HARDWARE DESCRIPTION

The Entube Z sensor family operates as a single ended voltage divider that outputs a $\pm 2V$ or $\pm 1V$ output signal, which can be processed by a computer based measurement platform.

The coaxial input line connect to the sensor via a SHV or BNC connector, while the conditioned signal from the sensor comes out on a standard BNC Plug.

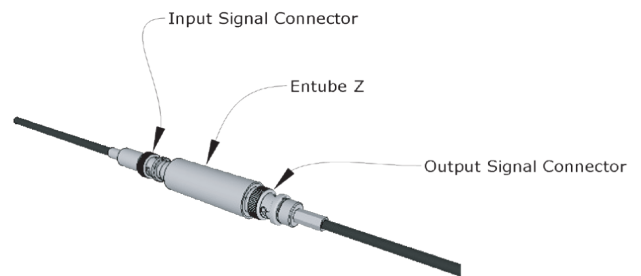


Mounting Sample of Entube Z

Due to its compact size and shape, the Entube Z sensor family can be easily mounted anywhere between the signal source and the data acquisition system. The versions up to 5kV may even be used inline with the cable and not require any mounting at all. All can be secured to fixtures using cable ties.



- (1) Form factor can vary for customized solutions.
- (2) High voltage connectors must always be cleaned prior to mating. The proper cleaning method is to wipe or spray the interface area with isopropyl alcohol and immediately blow an inert gas such as dry nitrogen over the interface area until dry. No other cleaning method should be attempted.

MECHANICAL DIMENSIONS

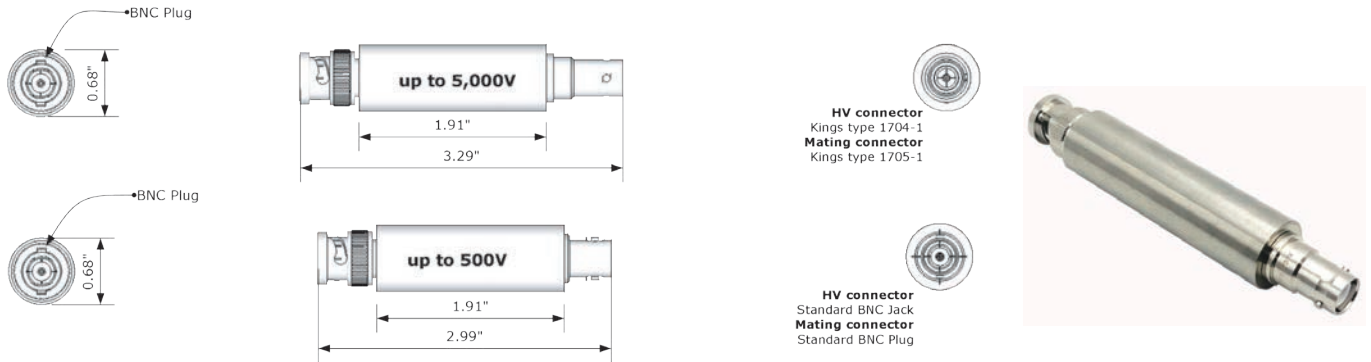

HARDWARE CONFIGURATION

- I** Connect BNC cable to sensor output. Make sure the BNC jack is connected to DAQ or at least properly grounded.
- II** Make sure Input Signal cable is de-energized to avoid arcing. Verify if input connectors are clean. Plug input signal into input connector of sensor.

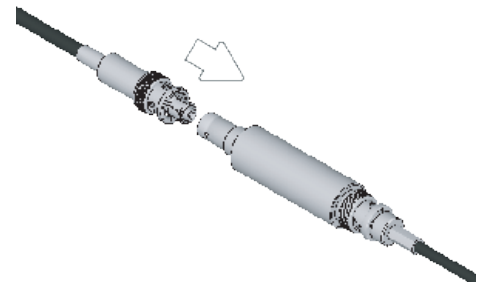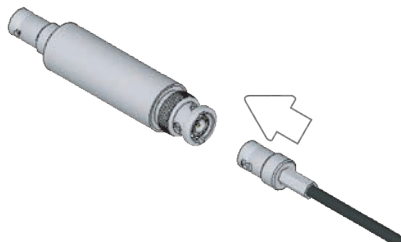

- III** Secure sensor to avoid accidental disconnection during operation.

